

ALLOYLED®




## PrimaPanel Flexible LED Sheet

Backlighting made easy. NOW with the freedom to cut on an angle.


Designed for backlighting applications such as displays, translucent materials, showcases and more, the fully modular PrimaPanel LED sheet can create a hotspot-free look and can be cut vertically, horizontally, or at a 45° angle with a 90+ CRI for excellent color rendering. Super-strong 3M™ adhesive tape on the back allows for easy installation on straight or curved surfaces. The sheet can also be mounted with nails or screws through the marked circular areas between the cuttable sections.



# PrimaPanel Flexible LED Sheet

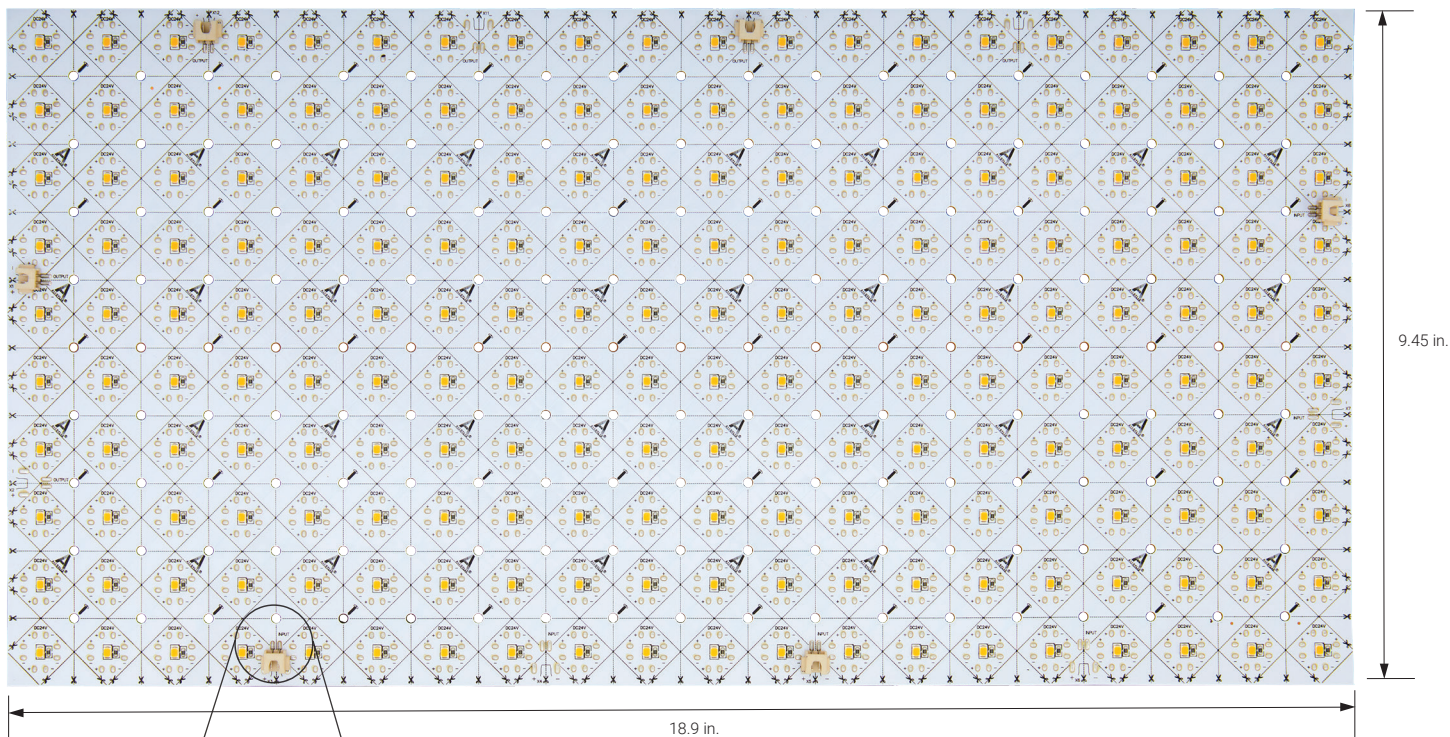

Solder pads allow complex configurations




Mountable with screws or nails

Six on-board connector ports


18.9 in.

9.45 in.

Includes two 3-inch jumper cables, two 6-inch hardwire cables and six screws. Additional cables available for purchase.

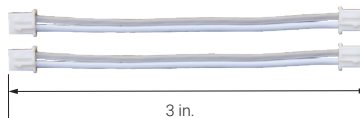

**Jumper Cable - 3 in.**  
AL-01-90-9902

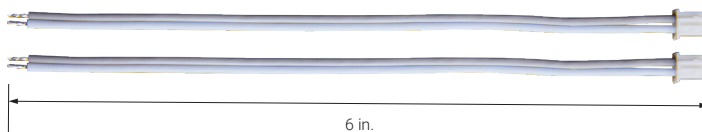

**Hardwire Power Cable - 6 in.**  
AL-01-90-9908

- High density of LED chips contributes to a smooth distribution of light
- Allows up to seven daisy-chained sheets for larger scale projects
- Multiple color temperatures for diverse applications

## Product Specifications

Item Number	Voltage	Color Temperature	CRI	R9 Values	R13 Values	TM30	CQS	Lumens per Sheet
AL-01-90-2402	24V DC	3000K	95.3	67.1	96.5	91.9	91.6	1269
AL-01-90-2403	24V DC	4000K	96.2	95.3	97.7	90.7	93.8	1313
AL-01-90-2404	24V DC	5000K	95.6	97.7	97.8	91.0	93.2	1293
AL-01-90-2409	24V DC	6500K	89.6	82.0	91.6	84.3	90.0	1309



## Order Now!

Email: [orders@AlloyLED.com](mailto:orders@AlloyLED.com)

Call: 800.910.LEDS (5337)

Text: 510.400.6690

Fax: 510.338.6173